

XKP-06 (<1.0kW) Swimming pool pump < 1,0 kW

Application

- Suitable for water circulation in small and medium swimming pools. Lightly dirty water with suspended particles will be perfectly filtered


Pompe

- Plastic body pump
- AISI 304 stainless steel shaft
- Maximum liquid temperature: +35°C
- Maximum suction height: 3.5 m

Moteur

- Copper winding motor or aluminium
- Integrated thermal protection for single-phase motors
- Insulation class: F
- Protection class: IPX5


Identifikationscodes

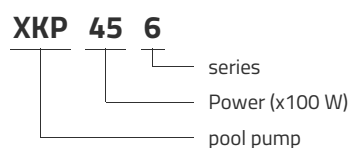

Technische Daten


| MODEL | kW | Q (m ³ /h) | 0 | 3 | 6 | 9 | 12 | 15 |
|--------|------|-----------------------|-----------|------|------|-----|-----|-----|
| | | | Q (l/min) | 0 | 50 | 100 | 150 | 200 |
| XKP256 | 0.25 | 7.5 | 6.3 | 2.9 | | | | |
| XKP306 | 0.3 | 8.5 | 6.3 | 2.9 | | | | |
| XKP356 | 0.35 | 9.5 | 8.2 | 6.2 | 1.5 | | | |
| XKP456 | 0.45 | 10.3 | 9.2 | 7.2 | 4.1 | | | |
| XKP556 | 0.55 | 12 | 11 | 9.9 | 8 | 5.5 | | |
| XKP856 | 0.85 | 12.5 | 12.4 | 11.8 | 10.5 | 8.5 | 6 | |

Maße

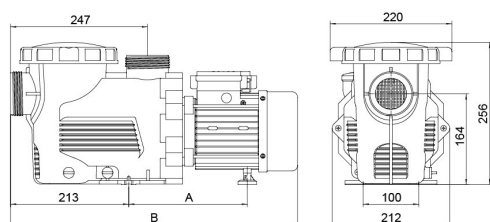

| MODEL | A | B |
|--------|-------|-----|
| XKP256 | 157.5 | 374 |
| XKP306 | 157.5 | 374 |
| XKP356 | 157.5 | 374 |
| XKP456 | 157.5 | 374 |
| XKP556 | 188.5 | 405 |
| XKP856 | 188.5 | 405 |

Hydraulische Leistung

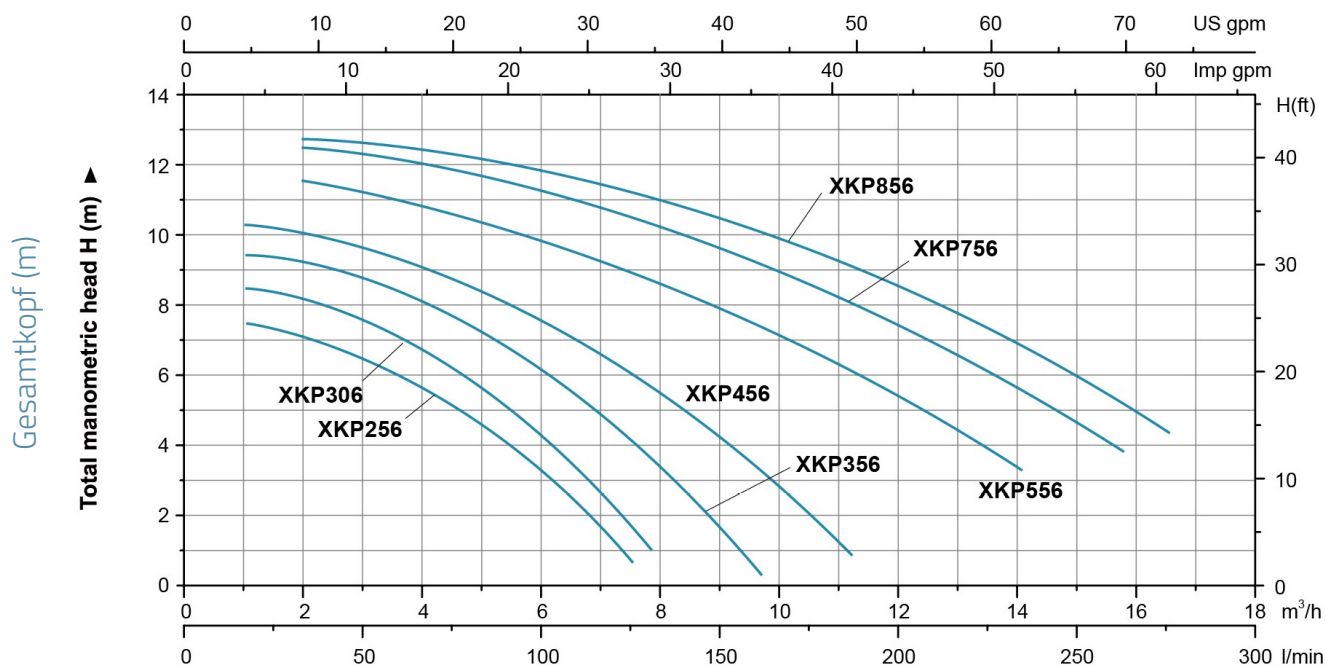

Packaging

| MODEL | Gewicht (kg) | Länge L (mm) | Breite W (mm) | Höhe H (mm) |
|--------|--------------|--------------|---------------|-------------|
| XKP256 | 5.4 | 410 | 170 | 200 |
| XKP306 | 6 | 410 | 170 | 200 |
| XKP356 | 5.8 | 410 | 170 | 200 |
| XKP456 | 6.1 | 410 | 170 | 200 |
| XKP556 | 6.4 | 410 | 170 | 200 |
| XKP856 | 7.4 | 410 | 170 | 200 |

