

LKS-PSW Powerful Submersible Drainage Pump



Application

• Suitable for pumping dirty water containing particles wih maximum up to 35mm.


Pompe

- High-quality and robust stainless steel housing.
- Ajustable handle for easy and reliable positioning of the float in different positions.

Moteur

Motor with thermal protector.

Identification codes

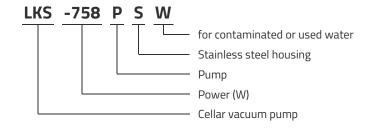

Technical data

MODEL	kW	Q (m³/h) Q (l/min)	1 17		16 267
LKS-758PSW - without floatswitch	0.75		9	5	1
LKS-758PSW - with floatswitch	0.75		9	5	1



